

## SLIM LINE



Bravo 100  
Bravo 125  
Bravo 150



Bravo  
Chrome



Bravo  
Platinum

### ■ Use

- Exhaust air fan

### ■ Application:

- Residential premises
- Flats, cottages
- Offices
- Utility spaces
- Trade premises
- Restaurants
- Job sites
- Health care facilities
- Child care facilities

### ■ Options:

#### Pull-cord switch

Pull-cord switch

#### Timer

Timer

- Time delay range from 2 to 30 min

#### Humidity sensor

Humidity

- Humidity level range from 50 to 90%
- Time delay range from 2 to 30 min

#### Motion sensor


Motion sensor

- Reach distance 1 to 4 m
- Sensor viewing angle up to 100°
- Time delay range from 2 to 30 min


### ■ Features:

- Wall and ceiling mounting
- Silent impeller
- Easy maintenance
- Long continuous work
- Back valve
- Ball bearing motor
- Decoration - Bravo Chrome, Bravo Platinum
- 5 years guarantee

Type	Pull-cord switch	Timer	Humidity sensor	Motion sensor
Bravo 100				
100 S	●			
100 T		●		
100 ST	●	●		
100 H			●	
100 SH	●		●	
100 IR				○
Bravo 125				
125 S	●			
125 T		●		
125 ST	●	●		
125 H			●	
125 SH	●		●	
125 IR				○
Bravo 150				
150 S	●			
150 T		●		
150 ST	●	●		
150 H			●	
150 SH	●		●	
150 IR				○

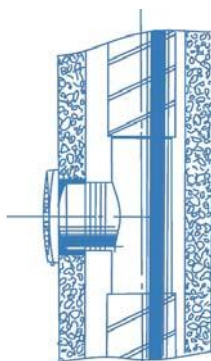


## Overall and mounting dimensions

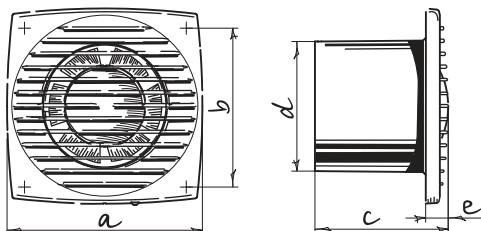

Type	Dimensions, mm				
	a	b	c	d	e
Bravo 100	150	122	102	100	17
Bravo 125	176	144	104	125	17
Bravo 150	205	174	124	150	19

## Specifications

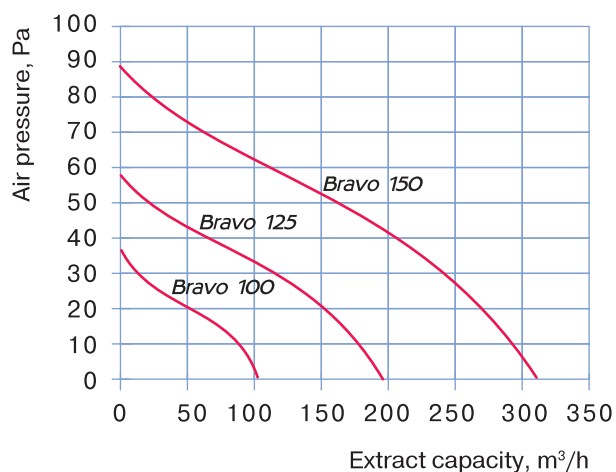

Parameters	Bravo 100	Bravo 125	Bravo 150
Voltage, V	220-240	220-240	220-240
Power, W	14	16	24
Extract capacity, m³/h	101	192	305
Noise level, dBA 3m	35	37	39
r.p.m.	2300	2400	2400



## Packing

