

"LUX" STAINLESS STEEL DESIGN



Lux 100
Lux 125
Lux 150



Lux-1



Lux-2



Lux-3



Lux-4



Lux-5



Lux-6

■ Use

- Exhaust air fan

■ Application:

- Residential premises
- Flats, cottages
- Offices
- Utility spaces
- Trade premises
- Restaurants
- Job sites
- Health care facilities
- Child care facilities

■ Options:

Timer

Timer

- Time delay range from 2 to 30 min

Humidity sensor



Humidity

- Humidity level range from 50 to 90%
- Time delay range from 2 to 30 min


■ Features:

- Wall mounting
- Silent impeller
- Easy maintenance
- Long continuous work
- Ball bearing motor
- Stainless steel front cover
- Built-in LED-Lamp (2 W)
- 5 years guarantee

Type	Timer	Humidity sensor
Lux 100		
100 T	●	
100 H		●
Lux 125		
Lux 150		

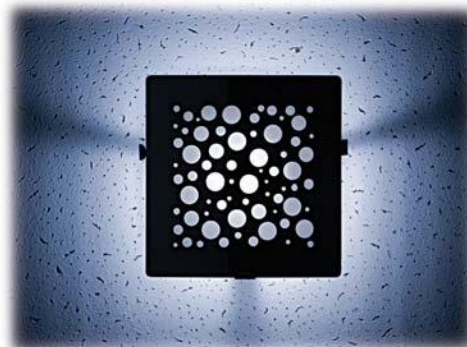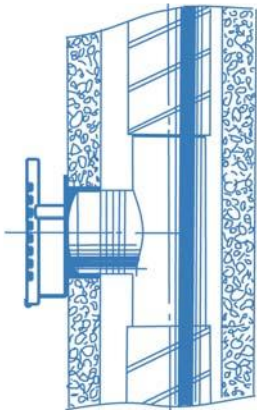


Overall and mounting dimensions

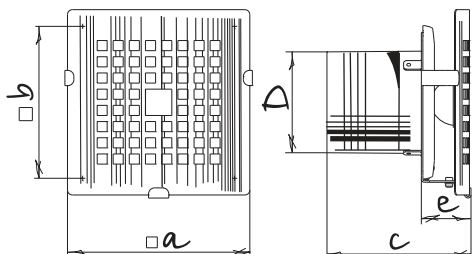

Type	Dimensions, mm				
	a	b	c	D	e
Lux 100	180	120	143	100	49
Lux 100 T	183	122	151,6	98	65
Lux 100 H	183	122	151,6	98	65
Lux 125	204	140	152	125	55
Lux 150	230	165	169	150	53

Specifications

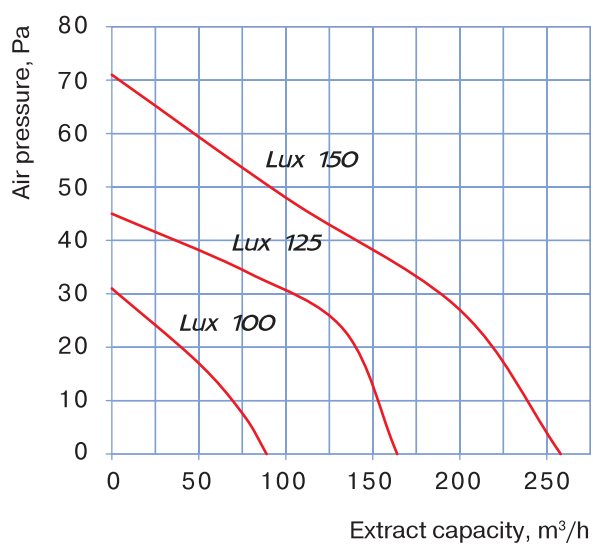

Parameters	Lux 100	Lux 125	Lux 150
Voltage, V	220-240	220-240	220-240
Power, W	14	16	24
Current, A	0,085	0,1	0,13
Extract capacity, m³/h	89	164	258
Noise level, dBA 3m	33	34	37
r.p.m.	2300	2400	2400



Packing

