

IN-LINE FAN



Tubo 100
Tubo 125
Tubo 150

■ Use

- For both input and extract ventilation

■ Application:

- Residential premises
- Flats, cottages
- Offices
- Utility spaces
- Trade premises
- Restaurants
- Job sites
- Health care facilities
- Child care facilities

■ Options:

Timer

Timer

- Time delay range from 2 to 30 min


■ Accessories:

- Bracket (to be ordered separately)



■ Features:

- Duct mounting
- Silent impeller
- Easy maintenance
- Long continuous work
- Ball bearing motor
- 5 years guarantee


Type	Timer
Tubo 100	
100 T	●
Tubo 125	
125 T	●
Tubo 150	
150 T	●

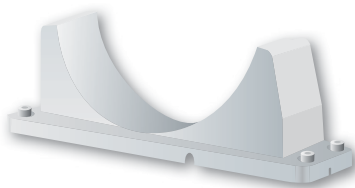

Tubo-u

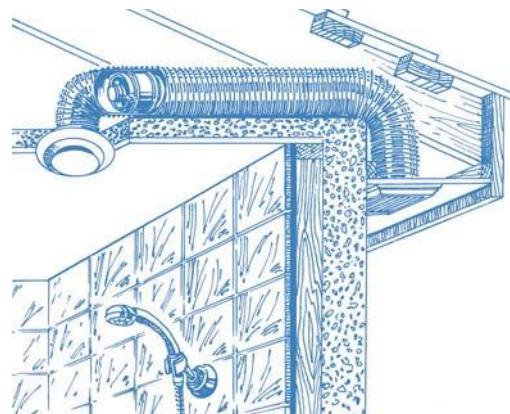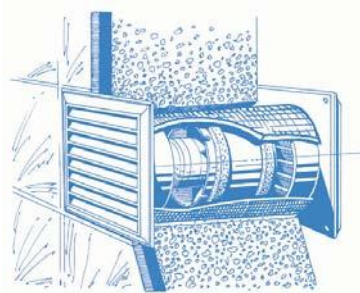


Overall and mounting dimensions

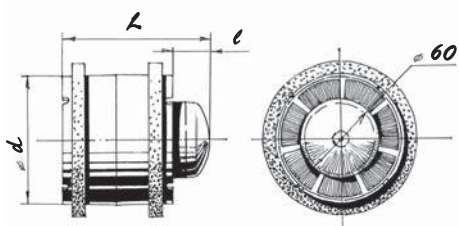

Type	Dimensions, mm		
	d	L	l
Tubo 100	98	115	30
Tubo 125	123	115	30
Tubo 150	148	135	30

Specifications

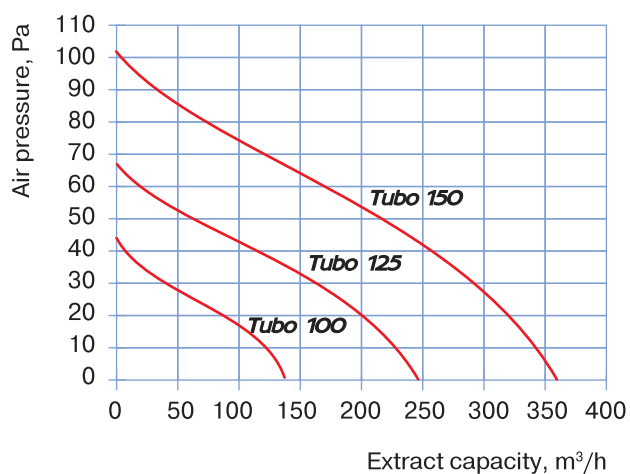

Parameters	Tubo 100	Tubo 125	Tubo 150
Voltage, V	220-240	220-240	220-240
Power, W	16	22	30
Extract capacity, m ³ /h	137	245	361
Noise level, dBA 3m	38	39	40
r.p.m.	2300	2400	2400



Packing

